



SEK SERIES

FEATURES


- Display Type : 6 x 25mm Wide Angle LCD Display
- 24 Bit Delta-Sigma A/D Converter with 1,000,000 Internal Counts
- Selectable Weighing Units (grams (1/60,000, 1/30,000 or 1/15,000 resolution), lb, lb-oz)
- All-In-One Program Includes : Straight Weighing Function / Counting Function / Weight Check Function / Quantity Check Function
- HI-OK-LO Check Status Indicators
- Programmable HI-OK-LO Audio Output
- Equipped with Power-on Zero Tracking, Digital Motion Filter at Zero & Weighing, Smart Power Saving, Power-on Zero, Full Tare Range, Auto Calibration Functions
- Low Battery Indicator
- Charge Status Indicator
- Bubble Level, Adjustable Feet Included
- Dual Power : By Built-in Rechargeable Battery or External AC Power Adaptor (Included)

OPTIONS

- Rear Display
- Backlight
- RS-232 Interface
- Relay Output

SPECIFICATIONS

Model No.	Capacity (Max)	Division (e)
SEK-3000	3000g / 6.6lb	0.05g / 0.01oz
SEK-6000	6000g / 13.2lb	0.1g / 0.01oz
SEK-12K	12kg / 26.45lb	0.2g / 0.01oz
SEK-30K	30kg / 66lb	0.5g / 0.02oz
SEK-60K	60kg / 132lb	1g / 0.1oz
Max. Tare Range	Full Tare Range (SUBTRACTIVE)	
Max. Zero Range	2% of Rated Capacity	
Weight Units	Metric(g), Avoirdupois(lb or oz), Pieces (pcs)	
Operation Environment	0~40°C (32~104°F) Non-condensed. R.H. ≤85%	
Power Source	6V 4Ah Rechargeable Battery or External Power Adaptor	

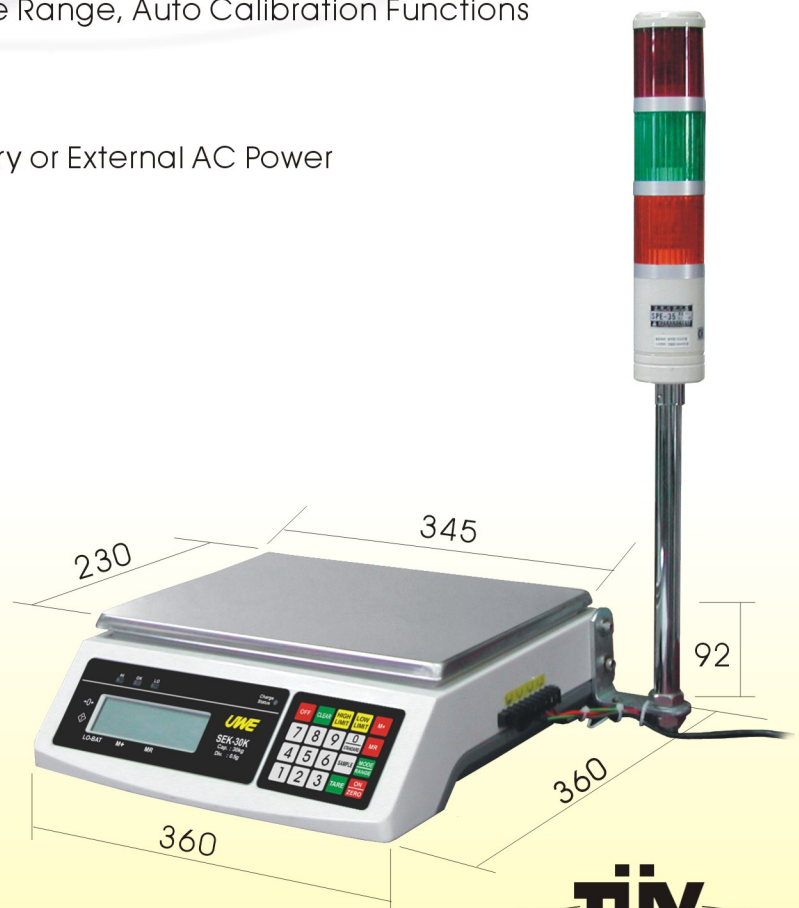

UNIVERSAL WEIGHT ENTERPRISE CO., LTD.

2-5 F, 39 PAO SHING RD. HSIN TIEN CITY, TAIPEI HSIEN, TAIWAN, R.O.C.
 TEL: 886-2-29180121 REP.(12 LINES) FAX: 886-2-29181508 • 29183652 • 29112176~7
[http:// www.uwe.com.tw](http://www.uwe.com.tw) , [http:// www.uwe-scale.com.tw](http://www.uwe-scale.com.tw)
 e-mail: int@uwe.com.tw

Printed in Taiwan